





**TransPacific Energy, Inc.**  
Innovative Energy Systems for A Cleaner World

**TransPacific Energy (TPE)** is a high-tech corporation that designs, builds, owns, operates, sells and installs proprietary, modular Organic Rankine Cycle (“ORC”) utilizing multiple refrigerant mixtures to maximize heat recovery and convert waste heat directly (75F to 950F) from industrial processes, solar and geothermal, biomass converting it into electrical energy. TPE technology can also be utilized as alternative to cooling towers, steam condensers and use heat released to efficiently generate electricity with air-cooled or water cooled condensers.

**TPE™** uses multi component fluids environmentally sound non toxic, non flammable, in contrast to the typical Organic Rankine Cycle that uses binary cycles and organic fluids such as pentane, isobutene, butane, propane and ammonia instead of water.

Count on **TransPacific Energy** efficient waste heat recovery for power generation using its propriety technology. Other applications include solar, geothermal energy as well as warm ocean waters. We deliver innovative solutions for cleaner greener world. Help us stop global warming with our green energy conversion technology.

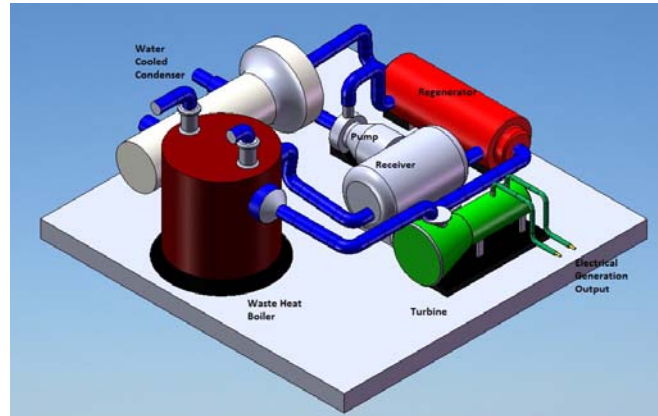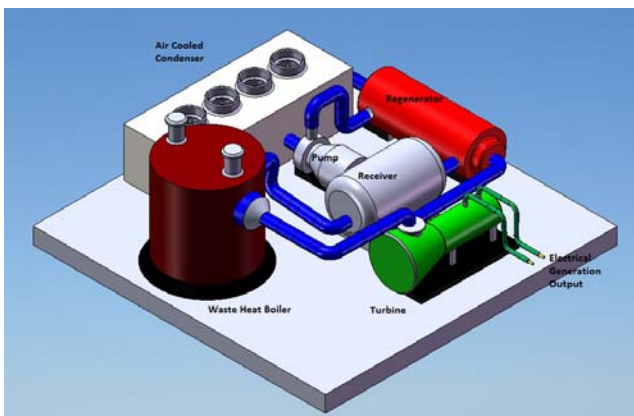

Contact us;

**TransPacific Energy, Inc**

5650 El Camino Real, Suite 285

Carlsbad, CA 92008

Tel: 760 476 9256

Fax: 760 476 9257


**866 919 8275**

Email: [information@transpacenergy.com](mailto:information@transpacenergy.com)




## ORGANIC RANKINE CYCLE ORC

The Rankine cycle is a closed loop thermodynamic cycle with a working fluid where an external heat source generates steam at its boiler. Water is the working fluid. Steam turbines, installed in power plants (coal fired, nuclear or biomass) are based on the cycle. In an Organic Rankine cycle (ORC), the working fluid is not water but an organic fluid such as butane or pentane, ammonia etc. This cycle is more suitable for low temperature and medium heat source applications than steam cycle.

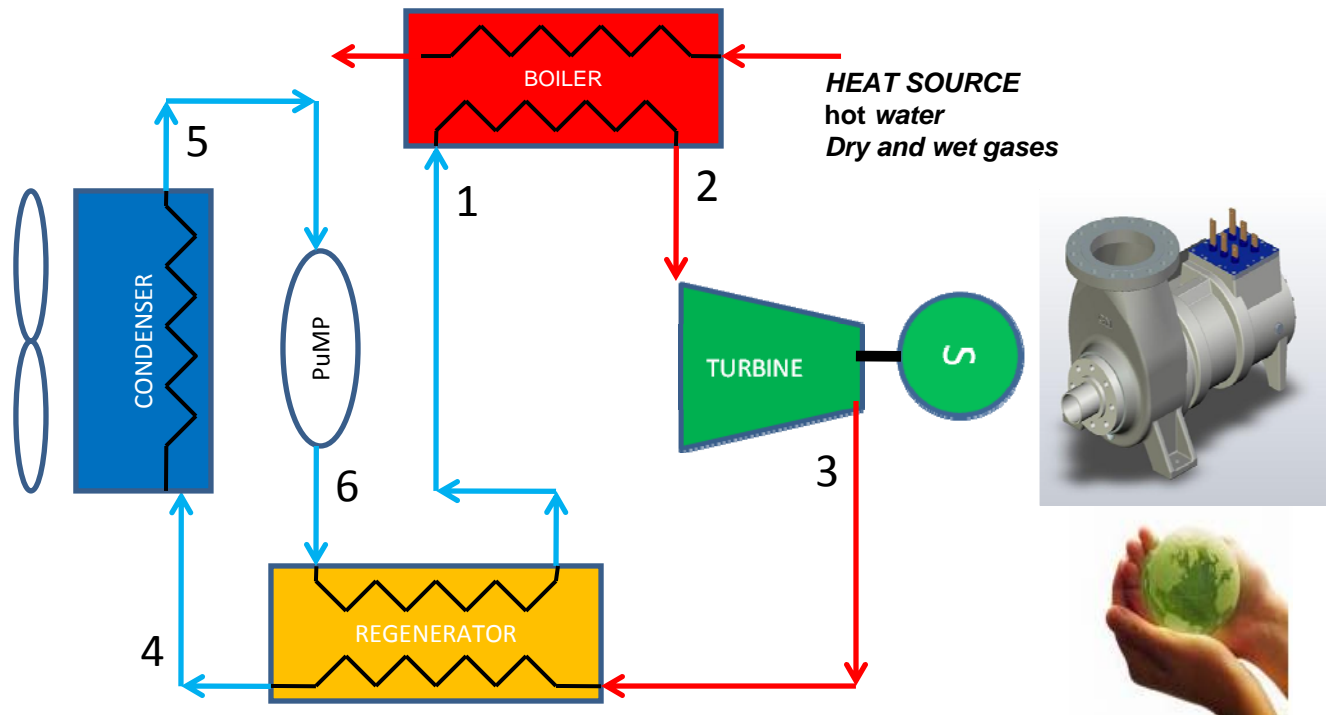


- 1-2: The organic fluid (blend) is vaporized and superheated in the evaporator
- 2-3: The organic vapor is expanded through the turbine
- 3-4: Expanded vapor heat up the organic liquid
- 4-5: Vapor is condensed
- 5-6: Organic liquid is pumped
- 6-1: Organic liquid is heated up with vapor from turbine outlet

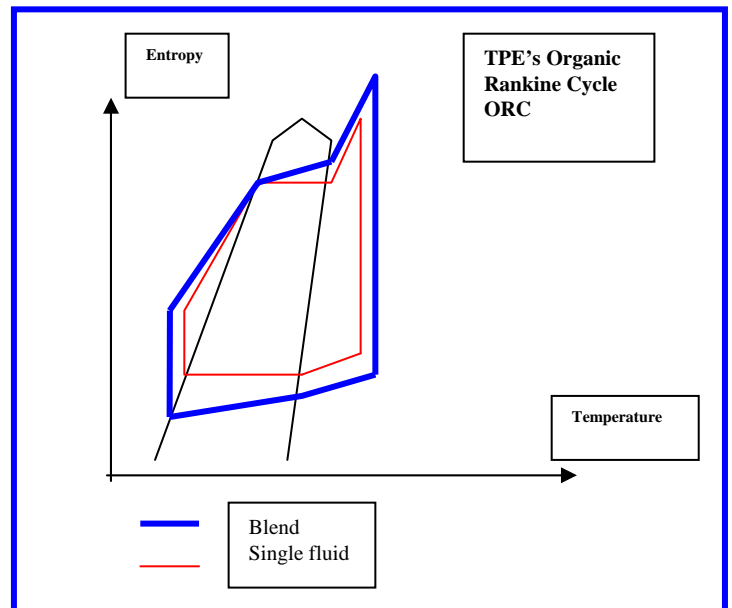



**TransPacific Energy (TPE) ORC** uses environmentally sound refrigerant mixtures (blend) formulated to maximize heat recovery at heat source temperatures from 25°C up to 500°C with enhanced electrical efficiency up to 35%. This permits a wide range of applications of the TPE ORC to generate power from waste and untapped heat sources such as liquid and effluent flue gases. Typical turbo generator shown below is for illustration purposes only and final product may vary.

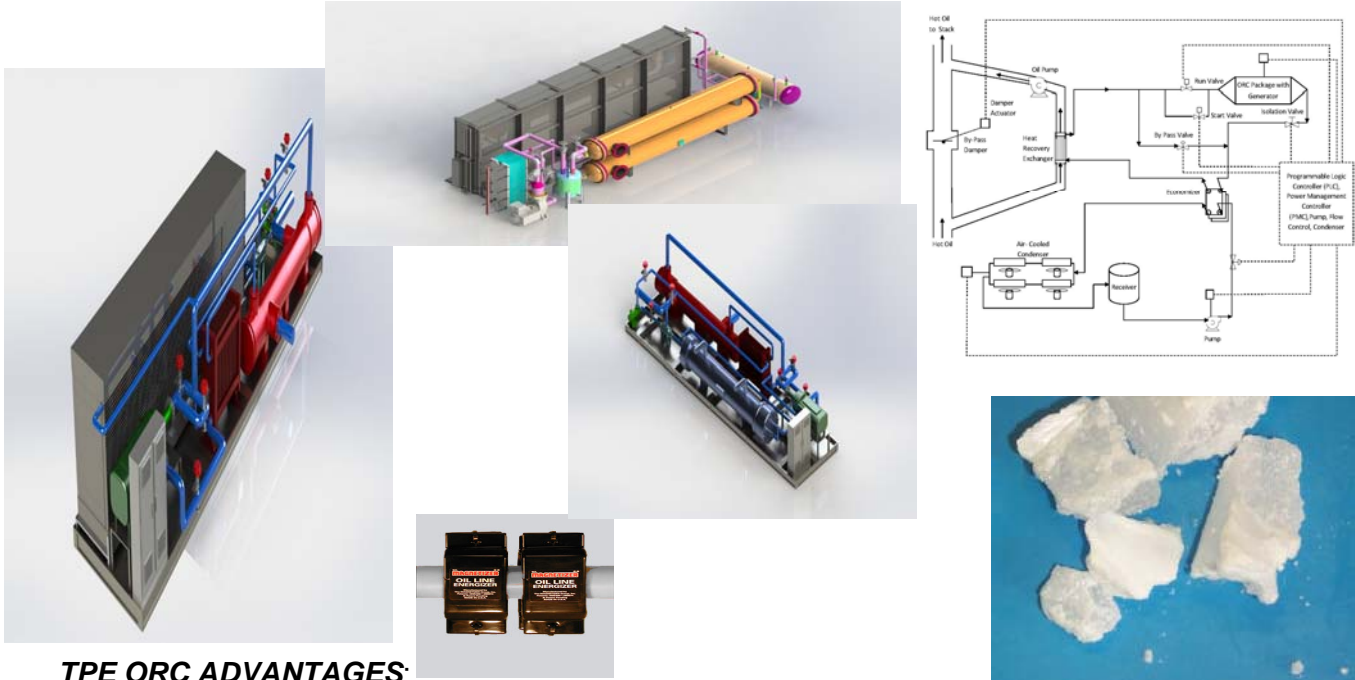


**TPE ORC ADVANTAGES:**


- Enhanced Heat to power electrical efficiency
- Variable boiling temperature to enhance heat recovery
- Hermetically sealed, no gear box
- Availability higher than 80% and efficient at wide range of temperatures
- Easy to install and limited footprint (skid mounted)
- Simple automated operation, PM and Ethernet PLC
- Low operation and maintenance cost
- Innovative certified refrigerant mixture
- Non flammable, non toxic working fluids
- Broad Temperature Applications
- Thermal storage uses patent technology; environmentally sound phase change material that meets codes and flame spread standards, and provides 24/7 power for solar, geothermal and load shaving
- Environmentally sound; no fuel consumption, reduce carbon emission, and greenhouse gases, zero acid rain.

**TPE ORC UNITS:**


- Custom-made & turn-key Systems: 100 KW to 5,000 KW
- Multiple, Split and Cascade units.

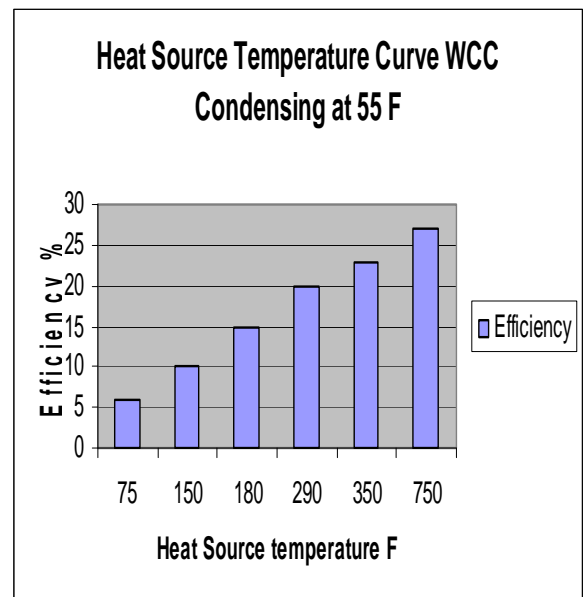

### ORC Power Output-Hot Water Single Unit




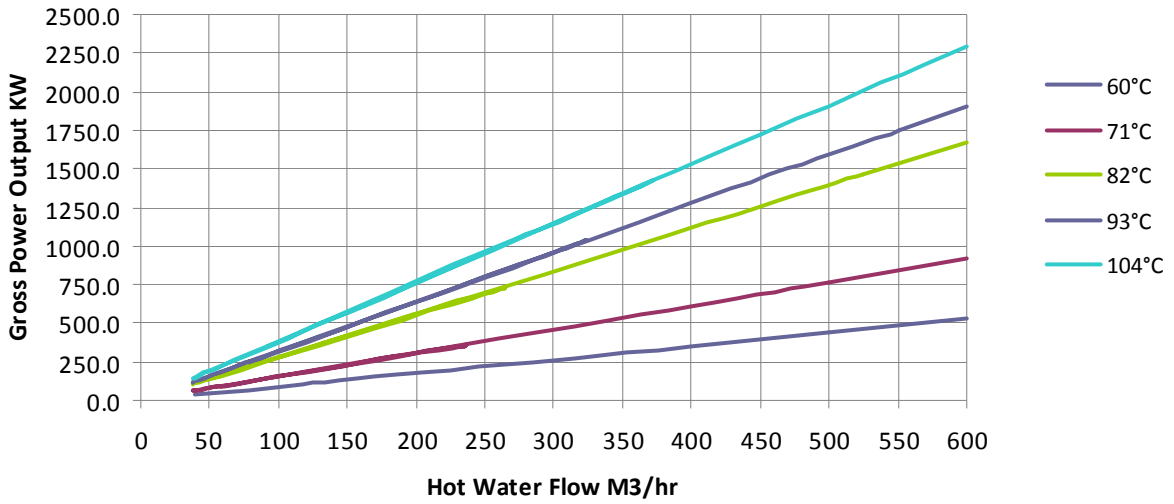


### ORC Gross Output: Flue Gas Single Unit

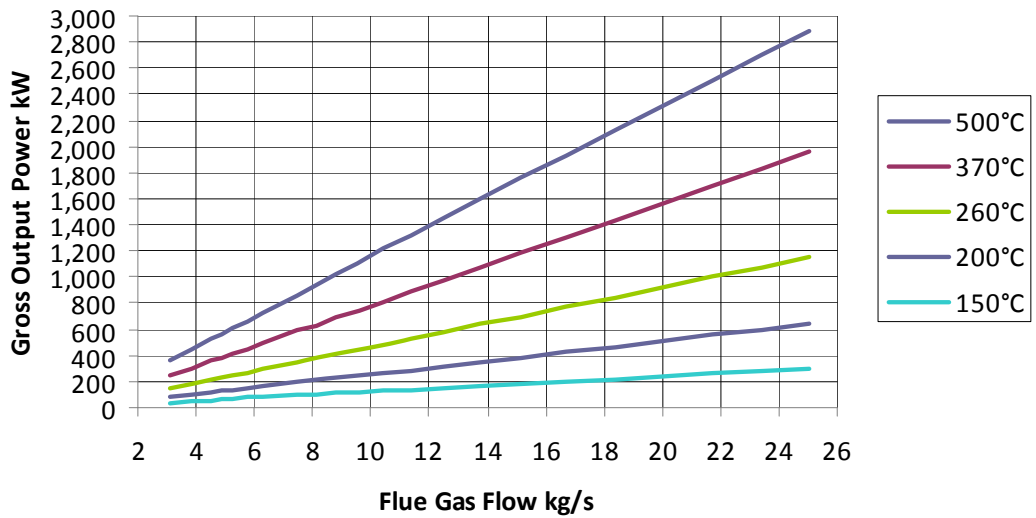

**Substantial Advantage....**

**TPE**

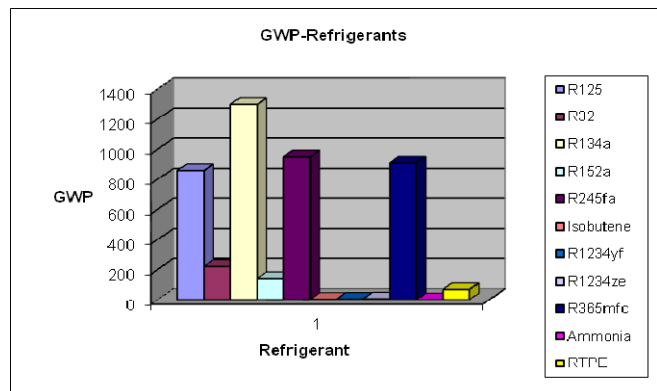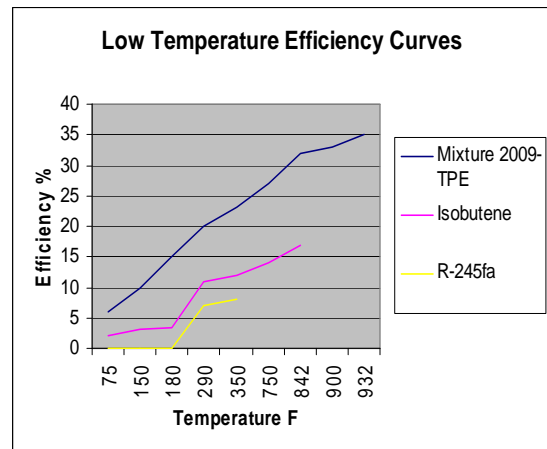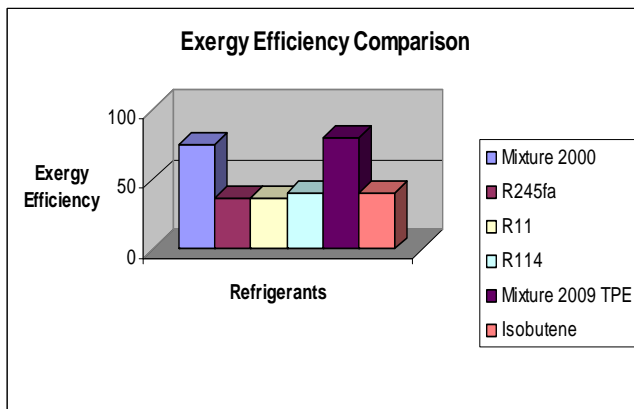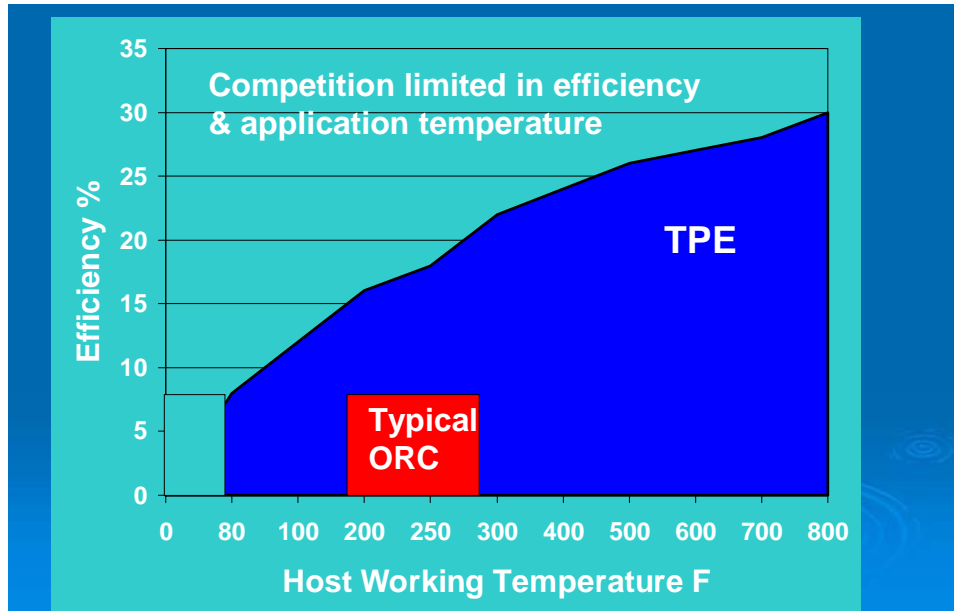

**Intellectual Properties:**

- *Electric Power Generator Using a Rankine Cycle Drive with Refrigerant Mixtures and Exhaust Combustion Products as a Heat Source, US Patent, USPO 8276383, 2012.*
- *Power Generator using a Wind Turbine, a Hydrodynamic Retarder and Organic Rankine Cycle drive, US Patent Pending, 2010.*
- *Methods and Apparatus for Thermal Storage using Heat Pipes, US Patent-, USPO 7891575, 2011*

## FIELD APPLICATIONS OF TPE ORC

### GAS FLARE:

- Waste landfill
- Waste water treatment plant
- Refineries
- Petrochemical industries



### INDUSTRY EFFLUENT:

- Paper industry
- Glass industry
- Cement industry
- Food industry (sugar, milk,...)
- Biofuel



### THERMAL PLANTS:

- All fossil fuel
- Solar thermal
- Geothermal



### POWER PLANTS:

- Cogeneration (gas turbine and engines)
- Biomass
- Biogas
- Wind turbine



### OCEAN THERMAL ENERGY:

- Coastal activities
- Offshore platform
- Ocean Thermal Energy Conversion (OTEC)

